


PRODUCT FACT SHEET / VITON MANHOLE SEAL

SPECIFICATIONS

PRODUCT CODE
MATERIAL
MAX. TEMP
MIN. TEMP

AMF-MH-GA-500-Viton
VITON
+205 ° CELSIUS
-15 ° CELSIUS

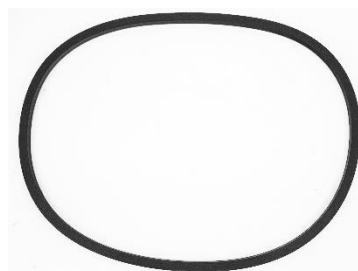

INSTALLATION, APPLICATION & MAINTENANCE

COMPATIBLE PRODUCTS

1. WATER
2. SOLVENTS
3. SILICONE OILS & GREASE

4. FUELS

- Petrol
- Diesel
- Paraffin

5. BLACK PRODUCTS

- Bitumen
- Heavy fuel oil (HFO)
- Pitch oil / Creosote

6. VARIOUS ACIDS

(Examples of compatible products, but not limited to. Contact AMF SALES for additional confirmations)

DESIGN AND APPLICATION

The Viton manhole seal is designed to offer outstanding Durability, Flexibility and Chemical Resistance, maintain their sealing performance over a wide range of operating conditions.

The Viton seal is a synthetic rubber that offers a unique combination of properties, making it suitable for a variety of sealing applications.

Key characteristics of Viton are:

- Chemical resistance
- Heat resistance
- Abrasion resistance
- Flame resistance
- Low moisture absorption
- High thermal stability

MAINTENANCE

The Hypalon seal offers a good operational life and is easily replaced when worn or damaged.

Regular inspection is advised to ensure all wear and tear items are in good working order.

WARNING: Use only genuine AMF replacement parts. Substitute parts can impair the proper functioning of this product and void all warranties. Failure to properly maintain and regularly clean the complete valve, especially moving parts, may prevent the valve from operating correctly as per its design, and subject to liability disclaimer.