


PARTS LIST					
ITEM	QTY	PART NUMBER	MATERIAL	DESCRIPTION	MASS
1	1	AMF_RV_65PRE_V2_ADR_316L_DUST CAP	316L	RB 100 X 29	0,521 kg
2	1	OUTER SPRING - PRESSURE AMF-017	SS	53 ID, 110 FL, SWG 4, TC 6	0.04 kg
3	1	INNER SPRING - PRESSURE AMF-016	SS	52 OD, 100 FL, SWG 5, TC 7	0.04 kg
7	1	AMF_VE_65PRE_ADR_V2_316L_ PRESSURE PISTON	316L	RB 85 X 16	0,330 kg
8	1	BS 334 VE O-RING	ENC	66.04 ID x 5.33 CS Viton EPS	0,006 kg
9	1	AMF_RV_65VP_VAC_PRE_TH_V2_ADR_316L_MAIN BODY	316L	RB 95 X 85	0,658 kg
12	1	M4 x 4 grub screw	SS	4mm OD x 4mm long	0.001 kg



NOTE:
ALL THREADED PARTS TO BE GREASED
WITH COPPER COMPOUND

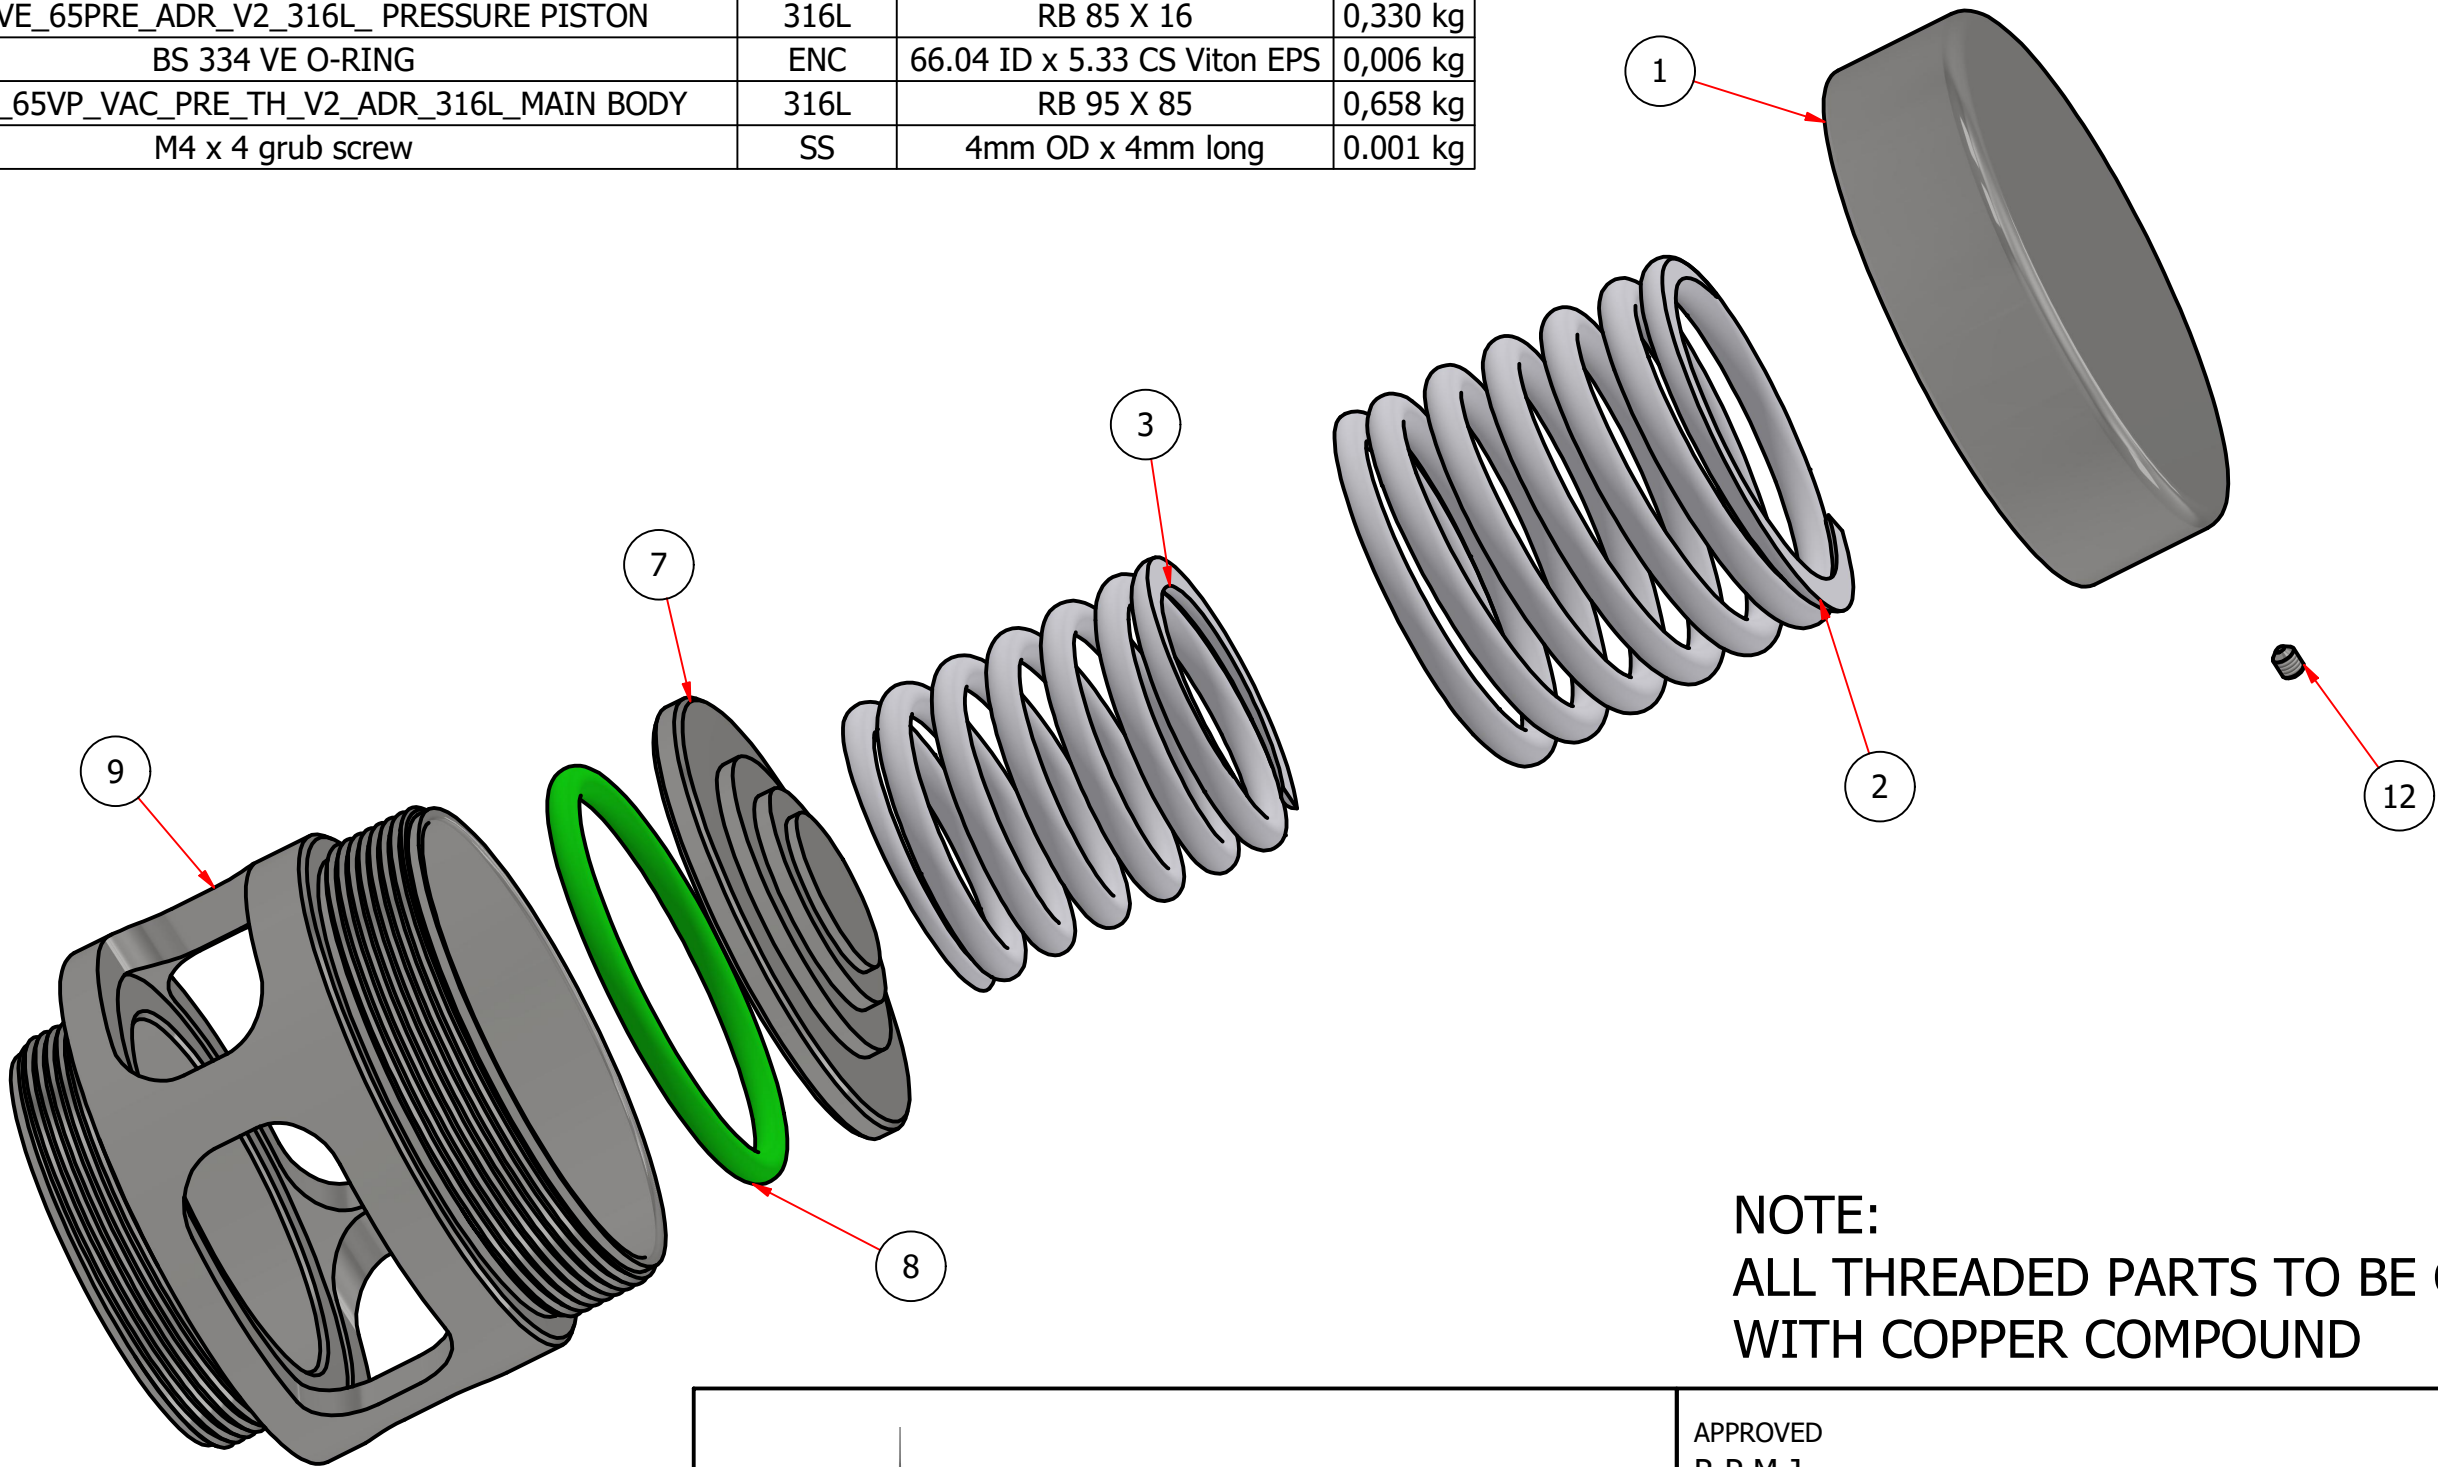

NO TRANSFER OF INTELLECTUAL PROPERTY : Any & all drawings, documentation, information or data provided by AMF to be used solely for the use intended by AMF,nor may it be shared, copied, distributed or disseminated in any manner whatsoever. All intellectual property, including AMF's drawings,shall remain the sole property of AMF.

APPROVED R.P.M.J.		
TITLE 65mm RELIEF VALVE PRESSURE THREADED PARTS ASSEMBLY		
SIZE A3	DWG NO AMF_RV_65PRE_TH_V2_ADR_316L	REV
SCALE 1 : 1	SHEET 1 OF 1	