


PARTS LIST					
ITEM	QTY	PART NUMBER	MATERIAL	DESCRIPTION	MASS
1	1	AMF_RV_65VP_V2_ADR_316L_DUST CAP	316L	RB 100 X 29	0,519 kg
2	1	OUTER SPRING - PRESSURE AMF-017	SS	OUTER SPRING - PRESSURE AMF-017	0.04 kg
3	1	INNER SPRING - PRESSURE AMF-016	SS	52 OD, 100 FL, SWG 5, TC 7	0.04 kg
4	2	M8 NUT x 1.25	SS	Hex Jam Nut	0,003 kg
5	1	AMF_RV_65VP_V2_ADR_316L V.P SPRING RETAINER	316L	RB 40 X 15	0,038 kg
6	1	SPRING - VACUUM AMF-015	SS	34 OD, 65 FL, SWG 14, TC 6	0.04 kg
7	1	AMF_RV_65VP_V2_ADR_316L PRESSURE PISTON	316L	RB 85 X 16	0,245 kg
8	1	BS 334 VE O-RING	ENC	66.04 ID x 5.33 CS Viton EPS	0,006 kg
9	1	AMF_RV_65VP_VAC_PRE_TH_V2_ADR_316L MAIN BODY	316L	RB 95 X 85	0,658 kg
10	1	BS 216 VE O-RING	ENC	28.17 ID x 3.53 CS Viton EPS	0,001 kg
11	1	AMF_RV_65VP_V2_ADR_316L VACUUM PISTON	316L	RB 40 X 90	0,072 kg
12	1	M4 x 4 grub screw	SS	4mm OD x 4mm long	0.001 kg



NOTE:
ALL THREADED PARTS TO BE GREASED
WITH COPPER COMPOUND

NO TRANSFER OF INTELLECTUAL PROPERTY : Any & all drawings, documentation, information or data provided by AMF to be used solely for the use intended by AMF,nor may it be shared, copied, distributed or disseminated in any manner whatsoever. All intellectual property, including AMF's drawings,shall remain the sole property of AMF.

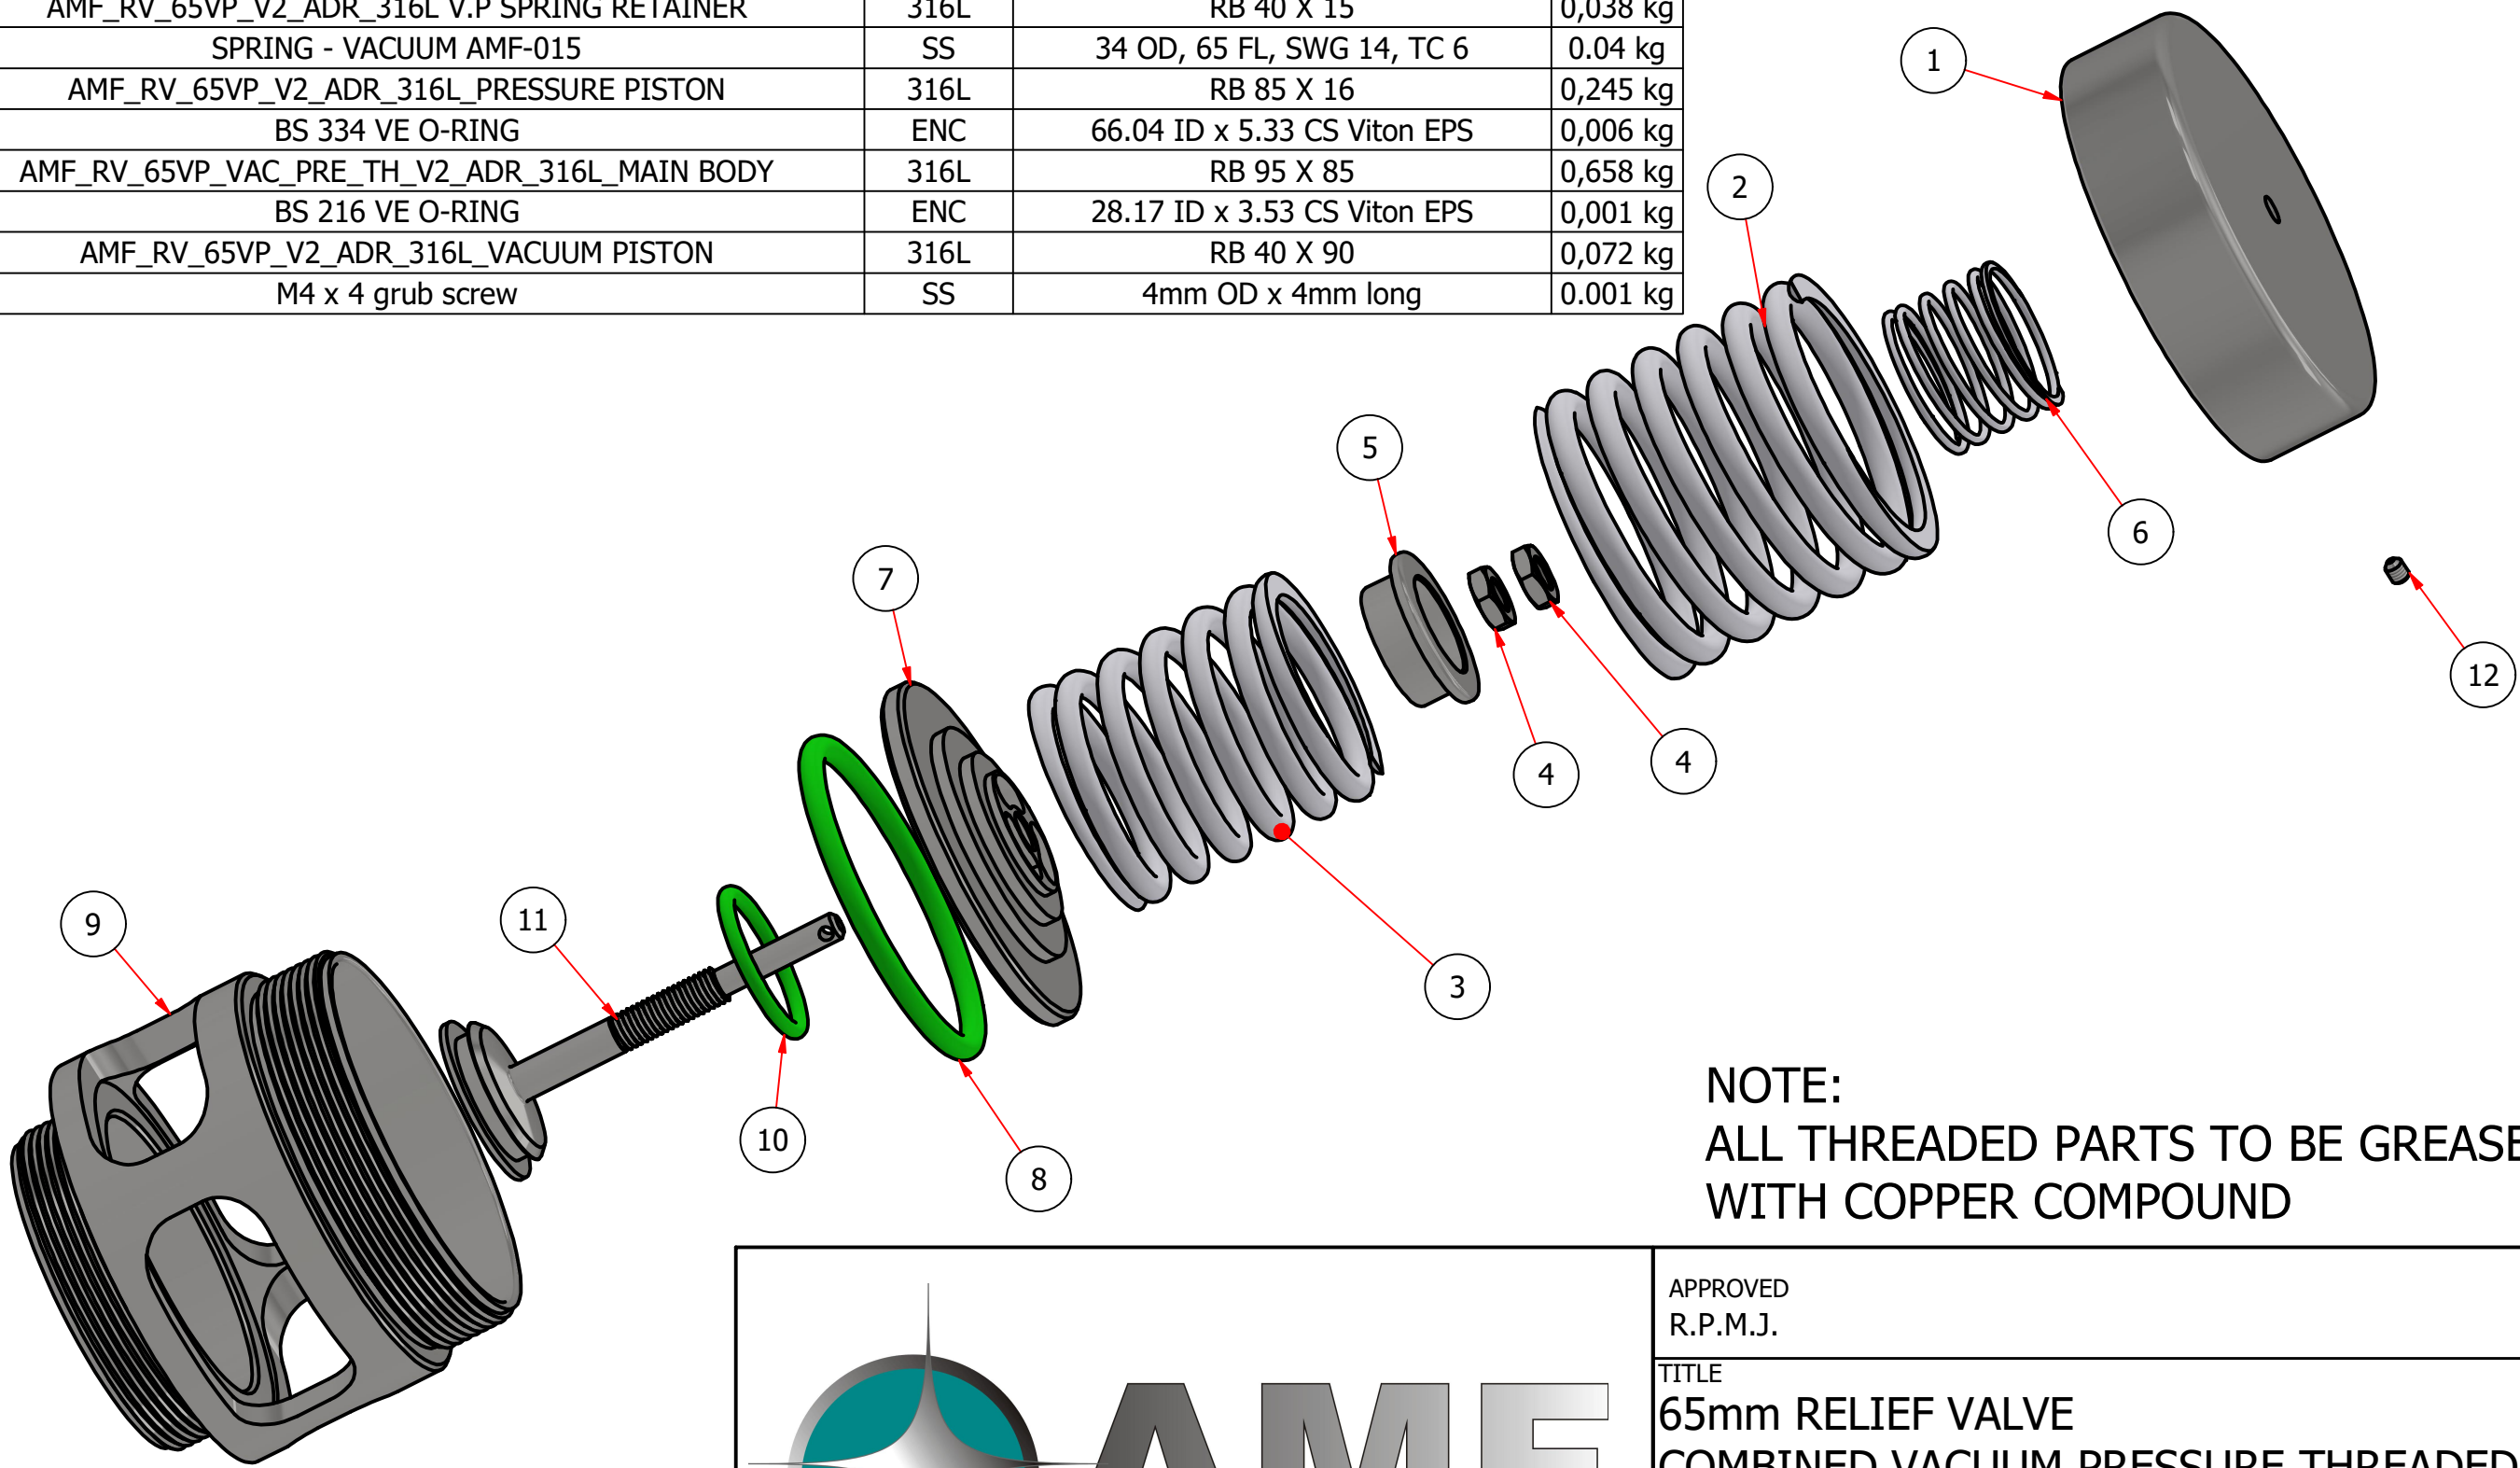

APPROVED
R.P.M.J.

TITLE
65mm RELIEF VALVE
COMBINED VACUUM PRESSURE THREADED
PARTS ASSEMBLY

SIZE	DWG NO	REV
A3	AMF_RV_65VP_TH_V2_ADR_316L	
SCALE	1 : 1	SHEET 1 OF 1